

# USB 2.0 Ranger® 2301

## 1-Port USB 2.0 100m CAT 5e/6/7 Extender System

The USB 2.0 Ranger 2301 is a single-port USB 2.0 high speed extension solution, enabling USB 2.0 connections at up to 480 Mbps over 100m/330ft of CAT 5e/6/7 cabling. It features full device and host support as well as Mass Storage Acceleration for improved bulk transfers speeds over previous generation extenders and the ExtremeUSB® suite of features.



### Features

The Ranger 2301 extends all USB 2.0 peripherals such as flash drives, keyboards, mice, webcams and interactive whiteboards across a dedicated CAT 5e/6/7 connection.


- USB 2.0 throughput up to 480 Mbps
- Supplies up to 1 Amp to USB port
- Operates with all USB controllers
- Mass Storage Acceleration
- FCC/CE Class B

Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, OS X® and Linux®

### Applications

- Remote storage
- Security and monitoring
- Professional Audio-Visual
- Keyboard and mouse

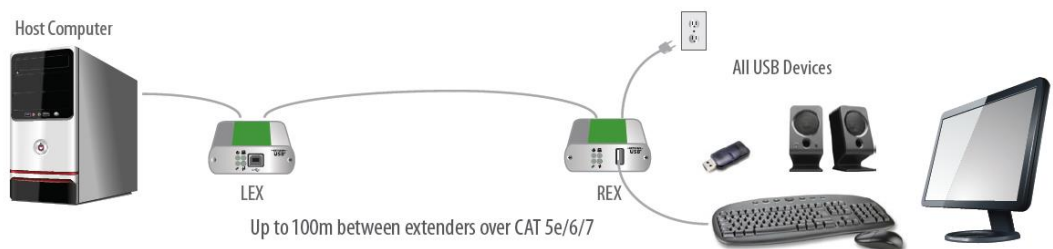

4664 Lougheed Hwy.  
Suite 221  
Burnaby, BC,  
V5C 5T5, Canada

www.icron.com  
sales@icron.com  
+1 604 638 3920



Specifications subject to  
change without notification.  
©2016  
Icron Technologies Corp.  
#90-01443-A01

## USB 2.0 Ranger® 2301 Specifications

### RANGE

Direct Connect: Up to 100m (330 ft) over solid core CAT 5e/6/7

### USB DEVICE SUPPORT

Maximum USB 2.0 Throughput: Up to 480 Mbps  
 Maximum USB 1.1 Throughput: Up to 12 Mbps  
 Traffic Types: All USB 2.0 and 1.1 Traffic Types  
 Device Types: All USB 2.0 and 1.1 Device Types

### LEX (LOCAL EXTENDER)

USB Connector: 1 x USB Type B Receptacle  
 Link Connector: 1 x RJ45  
 Dimensions: 86.0mm x 75.0mm x 26.0mm (3.4" x 3.0" x 1.0")  
 Enclosure Material: Silver Anodized Aluminum

### REX (REMOTE EXTENDER)

USB Connector: 1 x USB Type A Receptacle  
 Link Connector: 1 x RJ45  
 Dimensions: 86.0mm x 75.0mm x 26.0mm (3.4" x 3.0" x 1.0")  
 Enclosure Material: Silver Anodized Aluminum  
 Available Current: Up to 1 Amp to USB port  
 Power Supply: 100-240V AC Input, 5V 3A DC Output

### ENVIRONMENTAL

Operating Temperature: 0°C to 50°C (32°F to 122°F)  
 Storage Temperature: -20°C to 70°C (-4°F to 158°F)  
 Operating Humidity: 20% to 80% relative humidity, non-condensing  
 Storage Humidity: 10% to 90% relative humidity, non-condensing

### COMPLIANCE

EMC: FCC (Class B), CE (Class B)  
 Environmental: RoHS2 (CE)

### SUPPORT

Warranty: 2-year



Specifications subject to change  
 without notification.  
 ©2016  
 Icron Technologies Corp.  
 #90-01443-A01



## Ordering Information

The USB 2.0 Ranger® 2301 system includes a LEX, REX, USB Cable, Quick Start Guide, international power adapter with country specific power cord and 2-year warranty. For more information, email [sales@icron.com](mailto:sales@icron.com) or call +1 604 638 3920.

PART #	NAME	DESCRIPTION
00-00391	USB 2.0 Ranger® 2301 - NA	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, NA Power Cord
00-00392	USB 2.0 Ranger® 2301 - EU	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, EU Power Cord
00-00393	USB 2.0 Ranger® 2301 - UK	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, UK Power Cord
00-00394	USB 2.0 Ranger® 2301 - AU	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, AU Power Cord
00-00395	USB 2.0 Ranger® 2301 - JP	1-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, JP Power Cord